


# 15 & 20mm PSM DUAL CHECK VALVES

Arthur D Riley & Co Ltd are pleased to announce the availability of 15 and 20mm Dual Check Valves to meet AS/NZS 2845.1 1998 for Low Hazard conditions.

Housed in a tail to the same dimension as originally supplied with our PSM meters for ease of retro fitting.

For pricing and supply details please contact your local ADR office

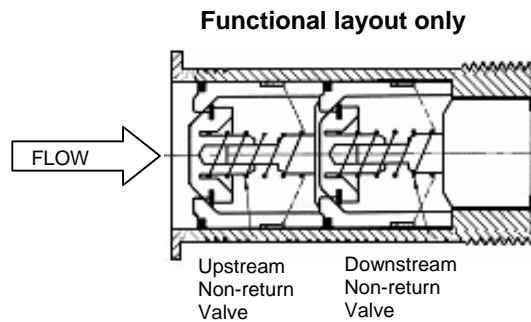

## Specification

Meter Size	DN	PN (Bar)	Temp °C	Pressure loss as per AS/NZS 2845.1 flow rates. Standard requires <50kPa
15mm	10	16	90	45 kPa @ 0.18 l/s
20mm	15	16	90	45 kPa @ 0.32 l/s